



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

REC'D 24 MAY 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03100767.7

BEST AVAILABLE COPY

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

R C van Dijk



Anmeldung Nr.:
Application no.: 03100767.7
Demande no:

Anmeldetag:
Date of filing: 25.03.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Bekaert VDS n.v.
E3-laan 75-79
9800 Deinze
BELGIQUE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se referer à la description.)

Universal vacuum coupling for cylindrical target

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

G23C14/34
G23C14/35
H01J37/34

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT SE SI SK TR LI

Field of the invention.

The present invention relates to a coupling system to releasably affix a cylindrical target to a spindle.

5 **Background of the invention.**

Cylindrical magnetrons with rotating cylindrical targets have been used more and more over the last decade. A cylindrical target in operation must be supported, rotated, cooled and energized.

10 Normally the sputtering installation is energized through one removable spindle at one end of the cylindrical target (cantilever mode) or two removable spindles at the two ends of the cylindrical target.

15 Supporting, rotating, energizing and cooling of the cylindrical targets is all done through the spindles. One side of the cylindrical target, the outer side of the target material operates under vacuum while the other side of the cylindrical target, the inner side, operates under substantially higher pressures. Water leaks occurring at the interface between the spindle and the cylindrical target have resulted in the development of various vacuum coupling and sealing systems.

20 US-A-5,591,314 (Vanderstraeten, now Bekaert VDS) discloses a coupling system to releasably affix a cylindrical target to a spindle by means of a threaded spindle collar engaging threads on the outside surface of the target.

25 EP-B1-1 092 109 (Sinvaco, now Bekaert VDS) discloses a coupling system where the cylindrical target is axially slidable over a first end portion of the spindle. The spindle terminates in a flange portion and the cylindrical target has a flange extremity. The coupling system
30 further has a clamping ring with which is composed of two or more clamp segments. Each clamp segment has a recess. This recess encloses both the flange portion and the flange extremity so as to couple the spindle to the cylindrical target.

35 EP-A1-1 106 893 (Unaxis) discloses a coupling system where the cylindrical target has a groove at its ends. The coupling further comprises a first ring and a second ring. The first ring or part of the first ring engages with the groove of the cylindrical target and the

second ring engages with the spindle. Both the first ring and the second ring are connected with one another to keep the cylindrical target and the spindle under an axial tension.

5 US-B1-6,375,815 (Lynn) discloses a coupling system where the spindle has a flange portion and the cylindrical target a flange extremity. Both the spindle and the cylindrical target are held together by means of a split clamping collar and a retainer ring. The split clamping collar encloses the flange portion of the spindle and the
10 flange extremity of the cylindrical target. The split clamping collar has inside threads. The retainer ring is slidable over the spindle and rotatable against the spindle. The retainer ring has outside threads, which are adapted to engage with the threads of the split clamping collar in order to couple the spindle to the cylindrical target.

15 In the Vanderstraeten embodiment the threaded end of the cylindrical target only fits with the Vanderstraeten spindle collar.

In the Unaxis embodiment the grooved end of the cylindrical target only fits with the first Unaxis ring.

20 In the Sinvaco embodiment the flange extremity of the cylindrical target has an outwardly angled step.

In the Lynn embodiment the flange extremity of the cylindrical target has an inwardly angled step.

25 Adapting one type of cylindrical target to another type of spindle means an irreversible destruction of some parts at the end of the cylindrical target.

So various systems exist next to each other. The result is this that once a coater has bought a sputter installation with determined spindles he is obliged to stick to determined cylindrical targets.

30

35

Summary of the invention.

It is an object of the present invention to avoid the drawbacks of the prior art.

5 It is also an object of the present invention to increase the interchangeability of cylindrical targets.

According to a first embodiment of the invention there is provided a coupling system to releasably affix a cylindrical target to a spindle.

The coupling system comprises :

- 10 a) a spindle which terminates in a flange portion ;
- b) a cylindrical target which has at its end a grooved outside circumferential surface ;
- c) an interface ring which has a circumferential inner surface adapted to engage with the grooved outside circumferential
- 15 surface of the cylindrical target ; the interface ring further has a flange extremity ;
- d) a clamping ring which is adapted to engage with the flange portion and with the interface ring in order to hold the cylindrical target to the spindle ;
- 20 e) one or more sealing rings between the spindle and the cylindrical target.

25 The cylindrical target has an outer end diameter and the interface ring has an inner diameter which may be - at least locally - greater than or equal to the outer end diameter of the cylindrical target.

The terms outer end diameter and inner diameter refer to the main part of resp. the cylindrical target and the interface ring, not taking into account local grooves or local protrusions.

30 According to a second embodiment of the invention there is provided a coupling system to releasably affix a cylindrical target to a spindle.

The coupling system comprises :

- a) a spindle terminating in a flange portion ;
- b) a cylindrical target having at its end a grooved inside
- 35 circumferential surface ;

- c) an interface ring having a circumferential outer surface adapted to engage with the grooved inside circumferential surface of the cylindrical target ;
- d) a clamping ring which is adapted to engage with the flange portion and with the interface ring to hold the cylindrical target to the spindle ;
- e) one or more sealing rings located between the spindle and the cylindrical target.

10 The cylindrical target has an inner end diameter and the interface ring has an outer diameter which may be - at least locally - smaller than or equal to the inner end diameter of the cylindrical target. The terms inner end diameter and outer diameter refer to the main part of resp. the cylindrical target and the interface ring, not taking into account local protrusions or local grooves.

20 Within the context of the present invention, the term cylindrical target both refers to a cylindrical target made out of a backup tube covered with a layer of target material and to a self supporting cylindrical target which is completely made out of the target material.

The grooved outside or inside circumferential surface of the cylindrical target may be a helical groove with e.g. at least one revolution.

25 In one preferable embodiment, the interface ring further may have a flange extremity.

The clamping ring may be preferably composed of two or more clamping segments. Each segment may have an inwardly oriented recess. The recess encloses the flange portion of the spindle and the flange extremity of the interface ring. Such a clamping ring can easily be removed from the coupling system.

30 More than two clamping segments may be advantageous in comparison with two clamping segments because of a higher number of point contacts in case the clamping ring gets hotter than the target.

35

So the outer surface of the interface ring with its flange extremity fits with the split clamping ring of e.g. the Sinvaco embodiment. As a result, thanks to the interface ring the grooved (both helical and non-helical) cylindrical targets now also fit with another type of coupling.

5

In another preferable embodiment, the interface ring may have radially protruding parts, e.g. in the form of a helix. The clamping ring engages with these protruding parts and, for example, may be screwed on the interface ring.

10

Brief description of the drawings.

The invention will now be described into more detail with reference to the accompanying drawings wherein

15

- FIGURE 1 is a cross-section of a first embodiment of a coupling system according to the present invention ;

- FIGURE 2 is a detailed view of a first embodiment of a coupling system according to the present invention ;

20

- FIGURE 3 is a side view of a first embodiment of a coupling system according to the present invention ;

- FIGURE 4 is a cross-section of a first alternative of a first embodiment of a coupling system according to the present invention ;

25

- FIGURE 5 is a cross-section of a second alternative of a first embodiment of a coupling system according to the present invention ;

- FIGURE 6 is a cross-section of a second embodiment of a coupling system according to the present invention.

30

35

Description of the preferred embodiments of the invention.

FIGURE 1, FIGURE 2 and FIGURE 3 illustrate a first embodiment of the coupling system with a helical groove in the cylindrical target. FIGURE 4 illustrates a first alternative to the first embodiment of the coupling system with a non-helical groove in the coupling system. FIGURE 5 illustrates a second alternative to the first embodiment of the coupling system with an interface ring with radially protruding parts.

10 Reference is first made to FIGURE 1, FIGURE 2 and FIGURE 3. A coupling system 10 is to releasably affix a cylindrical target 12 to a spindle 14. The target 12 may be provided with target material 13 to be sputtered. The spindle 14 terminates in a flange portion 16. The cylindrical target 12 has at its end a helical or spiral groove 18. The helix of the groove makes at least one revolution.

15 The coupling system 10 further comprises an interface ring 20. In this first embodiment the interface ring 20 is made of one single piece. This interface ring 20 has an inner diameter, which is greater or equal than the outer end diameter of the cylindrical target 12. The interface ring 20 has a circumferential inner surface 22, which is adapted to engage with the helical or spiral groove 18 of the cylindrical target 12. The interface ring 20 may be screwed over the cylindrical target 12. The interface ring 20 further has a flange extremity 24. In coupled status, the flange extremity 24 of the interface ring 20 abuts against the flange portion 16 of spindle 14. Preferably the flange extremity 24 has an inwardly protruding part 25. This protruding part 25 facilitates the positioning of the interface ring 20 to the target 12.

20 25 30 35

The coupling system 10 further comprises a clamping ring 26, which is composed of two or more clamp segments. Each clamp segment has an inwardly oriented recess 28. In coupled status this recess 28 encloses the flange portion 16 of spindle 14 and the flange extremity 24 the interface ring 20 in order to hold the cylindrical target 12 to the spindle 12. Preferably the surfaces of the flange portion 16 and of the flange extremity 24 are slightly conical. The recess 28 has also matching conical surfaces.

The coupling system further comprises an O-sealing ring 30 in an O-ring groove 32 of the flange portion 16 and a sealing ring 34 in a groove of the spindle end 36.

5 A helical spring 38 is inserted in the helical or spiral groove 18. The spring 38 also meets with the circumferential inner surface 22 of interface ring 20. Spring 38 is not permanently fixed to the helical or spiral groove 18 and can be made of another material than the material of the cylindrical target 12 or the material of the backup tube of the cylindrical target 12.

10 The clamp segments of clamping ring 26 are held together by means of bolting means 40.

FIGURE 4 shows a detailed view of a cross-section of a first alternative to the first embodiment of the coupling system 10. The difference with FIGURE 3 is now that the cylindrical target 12 now has a non-helical groove 42. As a result the interface ring 20 has an inner circumferential surface 44 which matches this non-helical groove 42. The interface ring 20 is here composed out of two or more segments in order to enable to mount the interface ring 20 on the cylindrical target 12.

FIGURE 5 shows a detailed view of a cross-section of a second alternative to the first embodiment of the coupling system 10. The differences with FIGURE 3 and FIGURE 4 mainly lie in the type of interface ring 20 and the type of clamping ring 26.

25 The interface ring 20 now has radially protruding parts 200 and 202 which may take the form of a helix. The interface ring 20 fits in a cylindrical groove 42 of target 12. In order to prevent the interface ring 20 from rotating a pin 50 may be provided which fits into the target 12 and into the interface ring 20. Alternatively the pin 50 may be integrated with the interface ring 20 or with the target 12.

30 The clamping ring 26 has been threaded at its inner side and may be screwed on the protruding helix 200, 202 of the interface ring 20 in order to clamp the cylindrical target 12 to the spindle 14.

35

5 FIGURE 6 shows a cross-section of a second embodiment of the coupling system 10. The target is provided with a groove 18 in the form of a helical thread. The difference with the first embodiment of FIGURES 1 to 3 is now that the thread 18 is now positioned at the inside circumferential surface of the target 12.

CLAIMS

1. A coupling system to releasably affix a cylindrical target to a spindle, said coupling system comprising :
 - 5 a) a spindle terminating in a flange portion ;
 - b) a cylindrical target having at its end a grooved outside circumferential surface ;
 - c) an interface ring having a circumferential inner surface adapted to engage with said grooved outside circumferential surface of said cylindrical target ;
 - 10 d) a clamping ring adapted to engage at its one side with said flange portion and to engage radially at its other side with said interface ring to hold the cylindrical target to the spindle ;
 - e) one or more sealing rings between said spindle and said cylindrical target.
 - 15

2. A coupling system to releasably affix a cylindrical target to a spindle, said coupling system comprising :
 - a) a spindle terminating in a flange portion ;
 - 20 b) a cylindrical target having at its end a grooved inside circumferential surface ;
 - c) an interface ring having a circumferential outer surface adapted to engage with said grooved inside circumferential surface of said cylindrical target ;
 - 25 d) a clamping ring adapted to engage at its one side with said flange portion and to engage radially at its other side with said interface ring to hold the cylindrical target to the spindle ;
 - e) one or more sealing rings between said spindle and said cylindrical target.
 - 30

3. A coupling system according to claim 1 wherein said cylindrical target has an outer end diameter and wherein said interface ring has an inner diameter which is greater or equal to the outer end diameter of the cylindrical target.
- 35

4. A coupling system according to claim 2 wherein said cylindrical target has an inner end diameter and wherein said interface ring has an outer diameter which is smaller or equal to the inner end diameter of the cylindrical target.
- 5 5. A coupling system according to any one of the preceding claims wherein said grooved outside circumferential surface or said grooved inside circumferential surface is a helical groove.
- 10 6. A coupling system according to claim 5 wherein said helical groove has at least one revolution.
- 15 7. A coupling system according to any one of the preceding claims wherein said interface ring further has a flange extremity and wherein said clamping ring is composed of two or more clamping segments, each segment having an inwardly oriented recess, said recess enclosing said flange portion of said spindle and said flange extremity of said interface ring.
- 20 8. A coupling system according to any one of claims 1 to 6 wherein said interface ring has some radially protruding parts and wherein said clamping ring engages with said radially protruding parts.
- 25 9. A coupling system according to claim 8 wherein said radially protruding parts take the form of a helix.
- 30 10. A coupling system according to any one of the preceding claims wherein said one or more sealings rings are an O-ring.
- 35 11. A coupling system according to claim 10 wherein said O-ring is at least partially located in said flange portion of said spindle.
12. A coupling system according to any one of claims 5 or 6, said coupling system further comprising a resilient member, said resilient member fitting in said helical groove.

13. A coupling system according to claim 12 wherein said resilient member is a spring.



5 14. A coupling system according to any one of the preceding claims wherein said target is provided with target material to be sputtered.

ABSTRACT :

A coupling system (10) to releasably affix a cylindrical target (12) to a spindle (14) comprises the following parts :

- 5 a) a spindle (14) terminating in a flange portion (16) ;
- b) a cylindrical target (12) having at its end a grooved outside circumferential surface (18) ;
- c) an interface ring (20) having a circumferential inner surface (22) adapted to engage with the grooved outside circumferential
- 10 surface (22) of the cylindrical target (12) ;
- d) a clamping ring (26) adapted to engage at its one side with the flange portion (16) and to engage radially at its other side with the interface ring (20) to hold the cylindrical target (12) to the spindle (14) ;
- 15 e) one or more sealing rings (30) between the spindle (14) and the cylindrical target (12).

The interface ring (20) makes it possible to use particular types of cylindrical targets (12) with other types of spindles (14).

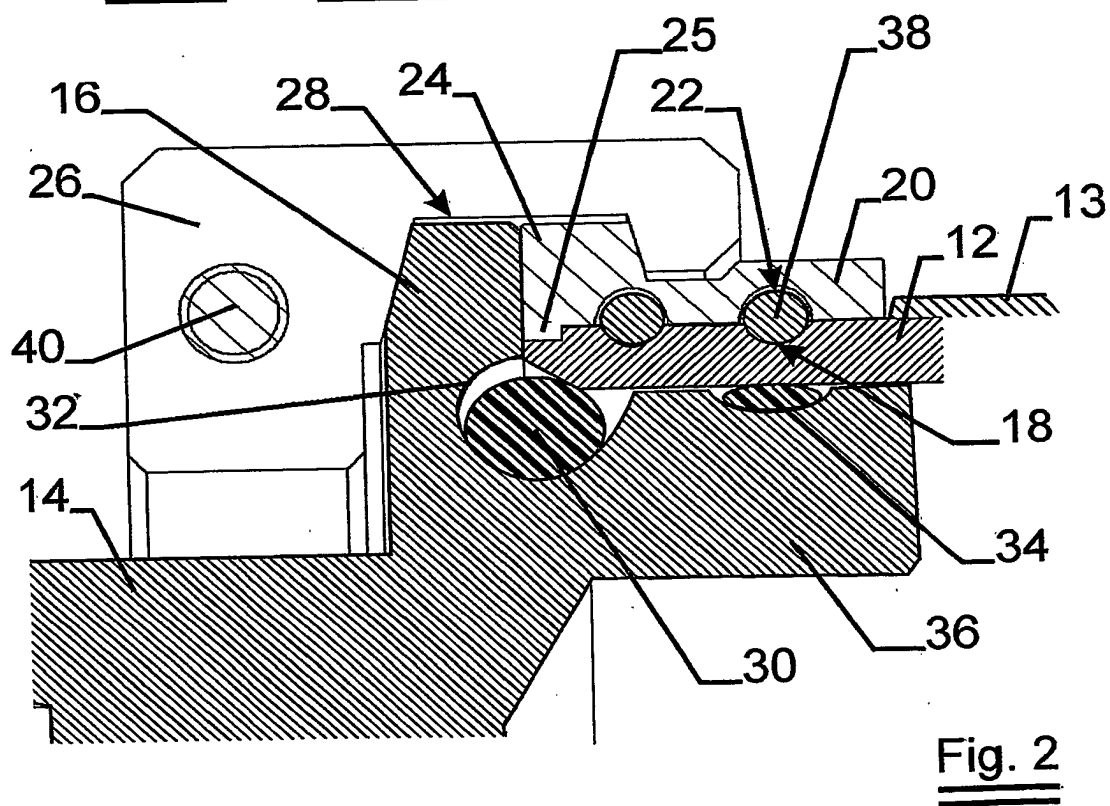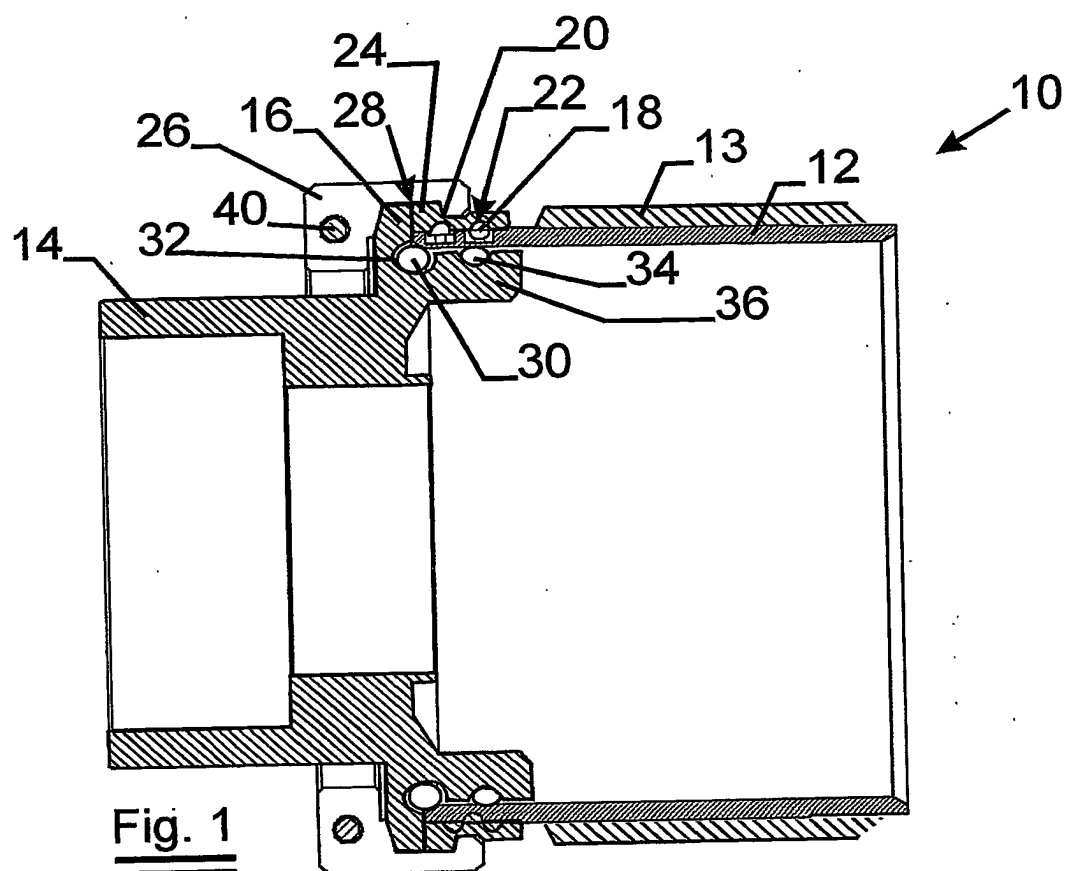

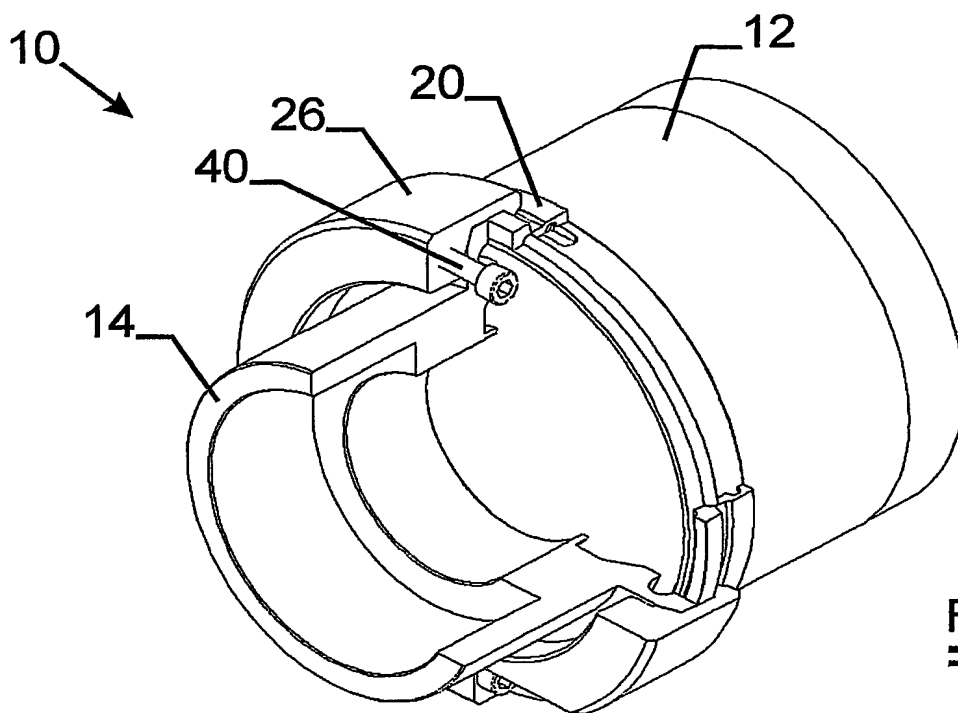


Fig. 3

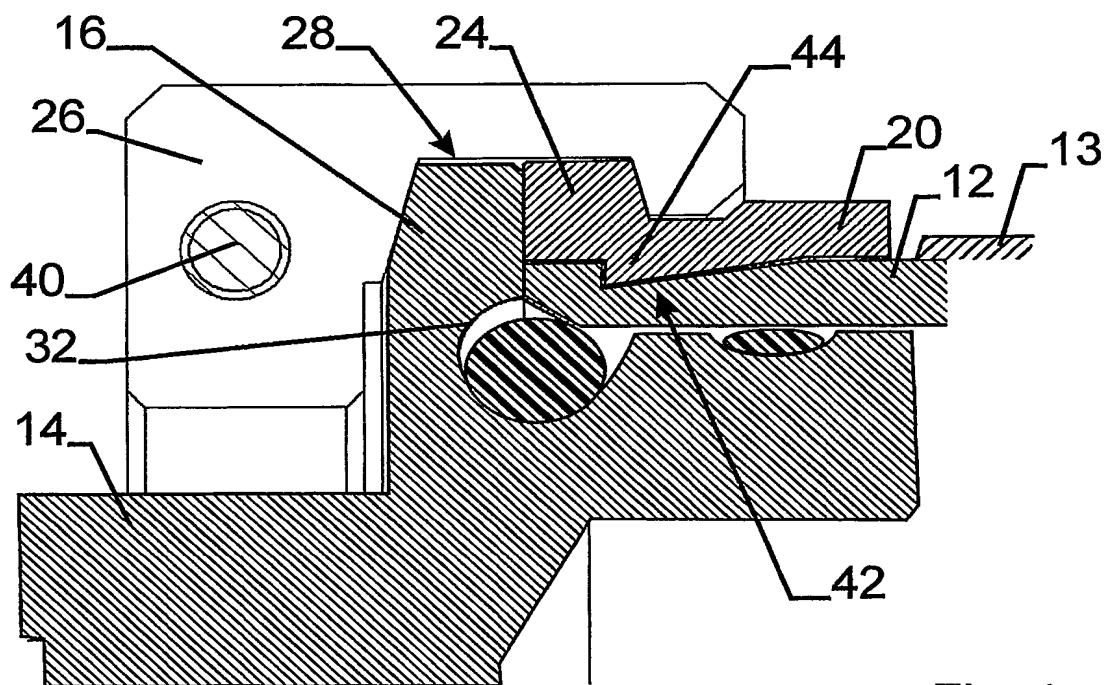


Fig. 4

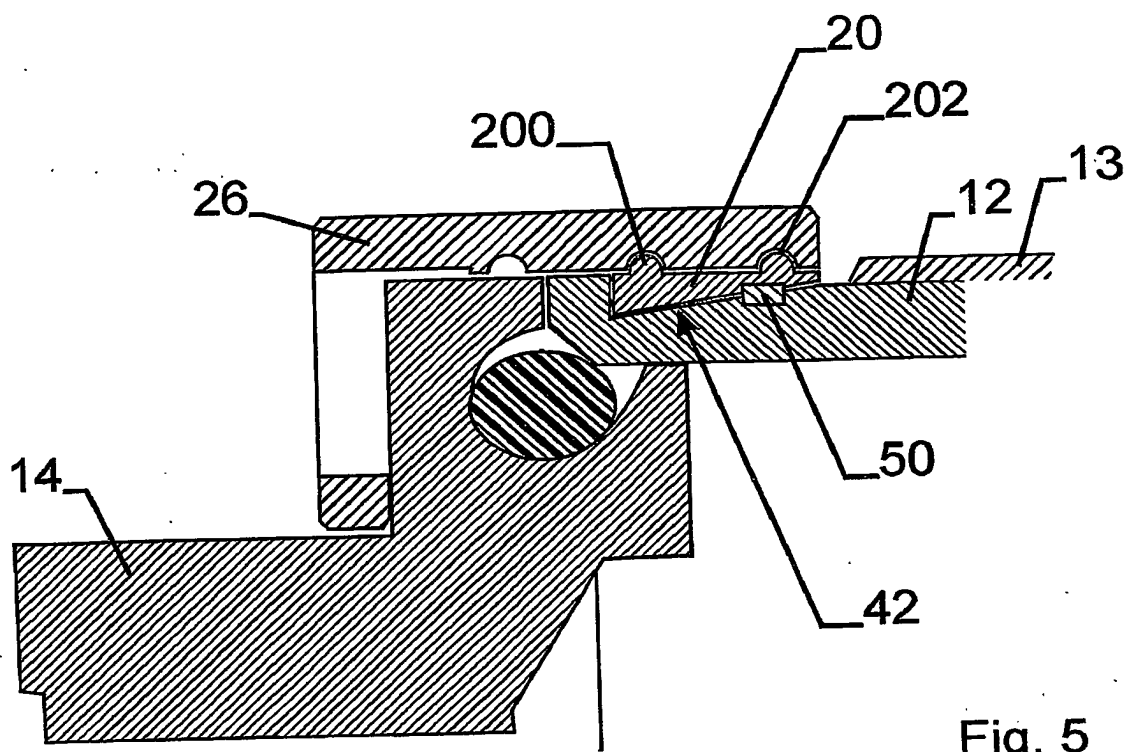


Fig. 5


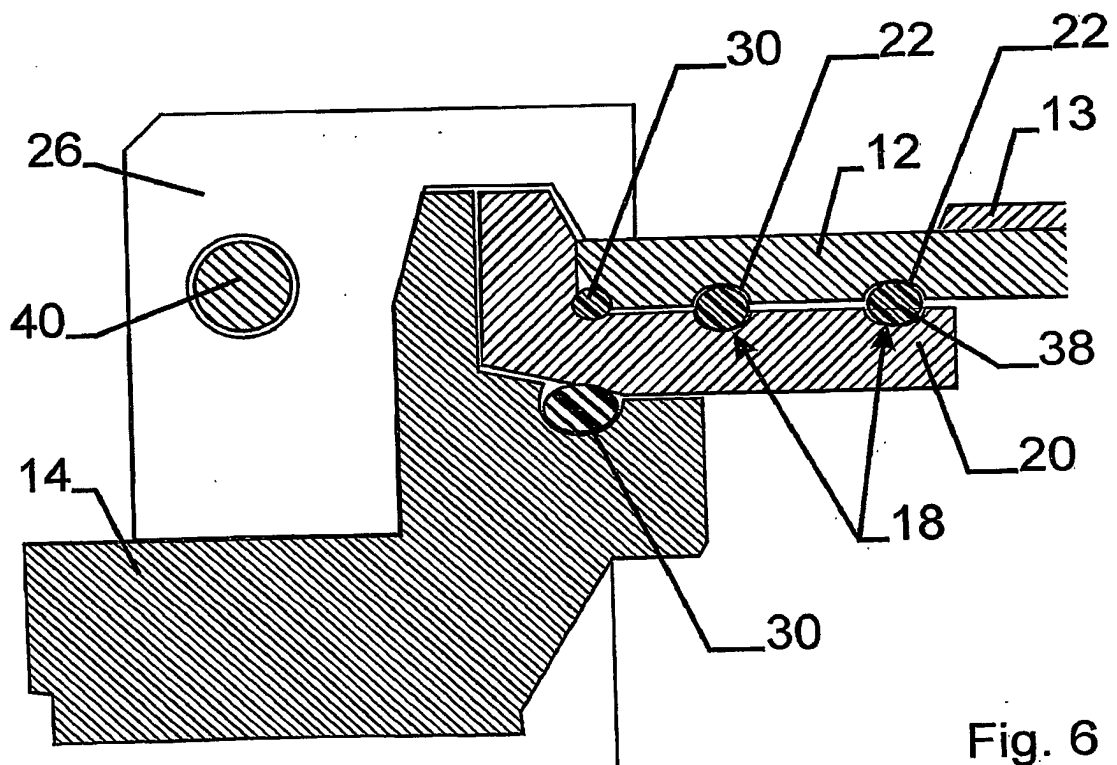


Fig. 6

PCT/EP2004/050188



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.